

TECHNICAL DATASHEET

DIGITUS • SERVER RACKS

DIGITUS Unique 9U 19" wall-mount cabinet, 600 × 600 mm (W × D), grey

9U wall mounting cabinet, Unique, 509x600x600 mm double sectioned, pivotable, grey (RAL 7035)

SKU DN-19 09-U-3

9U

Digitus



HEIGHT

9U

LOAD CAPACITY

100 kg

EXTERNAL DIMENSIONS

509 × 600 × 600 mm

PRICE

On request

REQUEST A QUOTATION ONLINE

serverinvest.com/product/digitus-dn-19-09-u-3

01 Product overview

This DIGITUS Unique wall-mounting cabinet uses a double-section design: a hinge in the rear wall frame lets the whole cabinet body swing away from the wall (up to 102°), giving direct access to the rear of patch panels and active equipment without dismounting anything. The rear frame carries its own 19-inch punch-outs and brush strips for cable entry.

This 9U model (part number DN-19 09-U-3) measures 509 × 600 × 600 mm (H × W × D) and is finished in light grey (RAL 7035) electrostatic powder coating. It is equipped with a lockable safety-glass front door. The 19-inch mounting rails accept equipment with an installation depth of 440 mm. Rated load capacity is 100 kg. It is delivered fully assembled.


The pivoting construction is particularly useful in tight spaces where rear access would otherwise be impossible, for example in corridors, ceiling-high installations or small technical rooms. The cabinet can also be used free-standing with optional feet or castors.

HIGHLIGHTS

- 9U 19" network enclosure, 600 × 600 mm footprint
- Lockable safety-glass front door
- Equipment installation depth 440 mm
- Load capacity 100 kg
- IP20 protection, Light grey (RAL 7035)
- Supplied fully assembled

KEY SPECIFICATIONS

Manufacturer	DIGITUS (ASSMANN Electronic)
Part number	DN-19 09-U-3
EAN	4016032186731
Series	Unique (wall-mount, double-section)
Cabinet type	Wall mounting cabinet
Height (rack units)	9U
Mounting standard	483 mm (19")
External dimensions (H × W × D)	509 × 600 × 600 mm
Width	600 mm
Depth	600 mm
Height	509 mm
Load capacity	100 kg

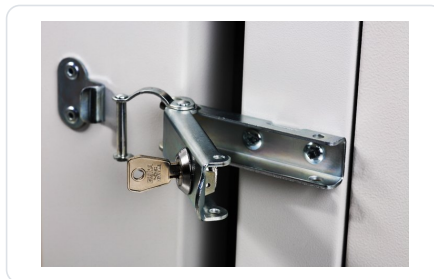

02 Full specifications

GENERAL

Manufacturer	DIGITUS (ASSMANN Electronic)
Part number	DN-19 09-U-3
EAN	4016032186731
Series	Unique (wall-mount, double-section)
Cabinet type	Wall mounting cabinet
Height (rack units)	9U
Mounting standard	483 mm (19")

DIMENSIONS

External dimensions (H × W × D)	509 × 600 × 600 mm
Width	600 mm
Depth	600 mm
Height	509 mm

LOAD

Load capacity	100 kg
---------------	--------

DOORS & SECURITY

Front door	Glass door, single opening
Side panels	Both sides
Front door	Lockable safety-glass door with steel frame
Door opening angle	210° door opening angle
Locking	Housing is connected to rear frame with separate locking mechanism (incl. individual key)
Front door	1-point-locking-mechanism on the front door
Side panels	Side panels are lockable and removable

CONSTRUCTION

Colour	Light grey (RAL 7035)
--------	-----------------------

PROTECTION

IP rating	IP20
Protection class	Safety class rating IP20

DELIVERY

Delivery state	Assembled
----------------	-----------

FEATURES

Feature	102° pivotable angle of the housing from the frame
Feature	Rear frame with 483 mm (19") punch outs
Feature	Incl. installation set (screws, cage nuts, washers)
Delivery	Rack is completely mounted

MOUNTING

19" rails	483 mm (19") profile rails mounted on the front side inside of the cabinet, galvanized
19" rails	483 mm (19") profile rails are adjustable in depth and with height unit marking
Max. installation depth	440 mm
Equipment mounting depth min.-max.	375-440 mm

CABLE MANAGEMENT

Cable entry	Cable entry on the rear side and base with plastic cover and top with sliding cover
-------------	---

Cable entry	Rear frame with brush strip for cable entry on top and base
-------------	---

COOLING

Roof	Roof is prepared for fan units (punched out entries)
Ventilation	Ventilation slots for active and passive ventilation and exhausting

GROUNDING

Earthing	Several earthing points for rack components
----------	---

PACKAGE CONTENTS

Included	Earthing wire set; Installation set (screws, cage nuts, washers); 2 x Keys
----------	--

LOGISTICS

Shipping weight	37.00 kg
-----------------	----------

03 Engineered, delivered & supported by ServerInvest

Engineering & sizing

Selected and sized against your real IT load, room and redundancy targets.

Installation

Delivery, installation and commissioning by our engineers across Europe.

Certified processes

ISO 9001, ISO 14001 and ISO 27001 certified project delivery.

Service & support

Maintenance, spare parts and support from a single partner.



Interested in this solution?

Request a quotation online or talk to a solutions engineer — we reply within one business day.
office@serverinvest.com

