TECHNICAL DATASHEET

DIGITUS · SERVER RACKS

DIGITUS Unique 9U 19" wall-mount cabinet, 600 × 600 mm (W × D), grey

9U wall mounting cabinet, Unique 509x600x600 mm, color grey (RAL 7035)

SKU DN-19 09U-6/6 | 9U | Digitus

HEIGHT	LOAD CAPACITY	EXTERNAL DIMENSIONS	PRICE
9U	100 kg	509 × 600 × 600 mm	On request

REQUEST A QUOTATION ONLINE

serverinvest.com/product/digitus-dn-19-09u-6-6

01 Product overview

The DIGITUS Unique wall-mounting cabinets bring the cable-management concept of the Unique floor-standing range to compact wall installations. A sliding cable inlet with foam seal in the roof, pre-cut inlets in the rear wall and floor and a prepared fan cut-out make cable routing and cooling straightforward. Lockable, removable side panels and a removable front door give full access during installation.

This 9U model (part number DN-19 09U-6/6) measures 509 × 600 × 600 mm (H × W × D) and is finished in light grey (RAL 7035) electrostatic powder coating. It is equipped with a lockable safety-glass front door. The 19-inch mounting rails accept equipment with an installation depth of 450 mm. Rated load capacity is 100 kg. It is delivered fully assembled.

Wall installation takes two steps: the frame plate is screwed to the wall and the cabinet body is then attached to it. With optional levelling feet or castors the cabinet can also be used free-standing. Typical uses are sub-distribution points, small offices, retail branches and CCTV or telephony installations.

KEY SPECIFICATIONS

Manufacturer	**DIGITUS (ASSMANN Electronic)**
Part number	**DN-19 09U-6/6**
EAN	**4016032157519**
Series	**Unique (wall-mount)**
Cabinet type	**Wall mounting cabinet**
Height (rack units)	**9U**
Mounting standard	**483 mm (19")**
External dimensions (H × W × D)	**509 × 600 × 600 mm**
Width	**600 mm**
Depth	**600 mm**
Height	**509 mm**
Load capacity	**100 kg**

HIGHLIGHTS

- 9U 19" network enclosure, 600 × 600 mm footprint
- Lockable safety-glass front door
- Equipment installation depth 450 mm
- Load capacity 100 kg
- IP20 protection, Light grey (RAL 7035)
- Supplied fully assembled

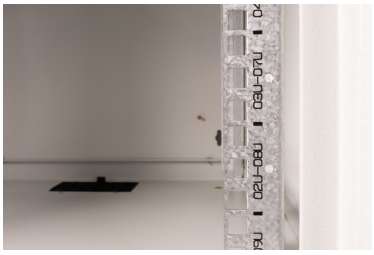

02 Full specifications

GENERAL	
Manufacturer	DIGITUS (ASSMANN Electronic)
Part number	DN-19 09U-6/6
EAN	4016032157519
Series	Unique (wall-mount)
Cabinet type	Wall mounting cabinet
Height (rack units)	9U
Mounting standard	483 mm (19")

DIMENSIONS

External dimensions (H × W × D)	509 × 600 × 600 mm
Width	600 mm
Depth	600 mm
Height	509 mm

LOAD

Load capacity	100 kg

DOORS & SECURITY

Front door	Glass door, single opening
Side panels	Both sides
Front door	Lockable safety-glass door with steel frame
Door opening angle	210° door opening angle
Front door	1-point-locking-mechanism on the front door
Side panels	Side panels are lockable and removable

CONSTRUCTION

Colour	Light grey (RAL 7035)

PROTECTION

IP rating	IP20
Protection class	Safety class rating IP20

DELIVERY

Delivery state	Assembled

MOUNTING

19" rails	483 mm (19“) profile rails mounted on the front- and rear side inside of the rack, galvanized
19" rails	483 mm (19“) profile rails are adjustable in depth and with height unit marking
Max. installation depth	450 mm
Equipment mounting depth min.-max.	320-450 mm

CABLE MANAGEMENT

Cable entry	Cable entry on the rear side and base with plastic cover and top with sliding cover

COOLING

Roof	Roof is prepared for fan units (punched out entries)
Ventilation	Ventilation slots for active and passive ventilation and exhausting

GROUNDING

Earthing	Several earthing points for rack components

FEATURES

Feature	Incl. installation set (screws, cage nuts, washers)
Delivery	Rack is completely mounted

PACKAGE CONTENTS

Included	Earthing wire set; Installation set (screws, cage nuts, washers); 2 x Keys

LOGISTICS

Shipping weight	23.70 kg

03 Engineered, delivered & supported by ServerInvest

Engineering & sizing
Selected and sized against your real IT load, room and redundancy targets.

Installation
Delivery, installation and commissioning by our engineers across Europe.

Certified processes
ISO 9001, ISO 14001 and ISO 27001 certified project delivery.

Service & support
Maintenance, spare parts and support from a single partner.

Interested in this solution?

Request a quotation online or talk to a solutions engineer — we reply within one business day.
office@serverinvest.com