

TECHNICAL DATASHEET

EATON • SERVER RACKS

Eaton Tripp Lite Series SmartRack 12U Mid-Depth Small Rack Enclosure, 600 mm × 851 mm, black

12U rack cabinet, 600 × 851 × 638 mm, 454 kg static load

SKU SR12UB

12U

Eaton



HEIGHT IN U

12U

EXTERNAL DIMENSIONS

638 × 600 × 851 mm

MANUFACTURER

Eaton (Tripp Lite Series)

PRICE

On request**REQUEST A QUOTATION ONLINE**serverinvest.com/product/eaton-sr12ub

01 Product overview

The Eaton SR12UB is a 12U floor-standing rack from the Tripp Lite Series SmartRack family, built to hold EIA-310 19-inch equipment in server rooms, data centres, IT closets and edge sites. Its external footprint is 638 mm high, 600 mm wide and 851 mm deep, and it accepts rack devices from 76 mm up to 826 mm deep. Eaton rates the steel frame for 454 kg of static load and 454 kg while rolling.

Security is provided by locking reversible vented front door, locking reversible perforated rear door and locking removable side panels. The vertical mounting rails use square-hole (cage nut) mounting, with numbered rack spaces for quick installation.



It ships fully assembled for fast deployment. Eaton backs the product with a 5-year limited warranty.

HIGHLIGHTS

- 12U of EIA-310 19-inch rack space, 600 × 851 mm footprint, 638 mm tall
- 454 kg static load rating / 454 kg rolling
- Adjustable rails accept equipment up to 826 mm deep
- Lockable doors and side panels
- 5-year limited warranty

KEY SPECIFICATIONS

Manufacturer	Eaton (Tripp Lite Series)
Model	SR12UB
Series	SmartRack Floor-Standing Enclosure
Rack type	Small Enclosure
UPC	037332157911
Compatible devices	Patch Panel, Network Switch, UPS, Server
Height in U	12U
External dimensions (H × W × D)	638 × 600 × 851 mm
Rack depth class	Mid
Usable equipment depth	76–826 mm
Factory preset rail depth	719 mm
Unit weight	47.63 kg

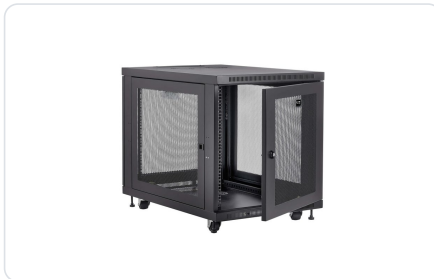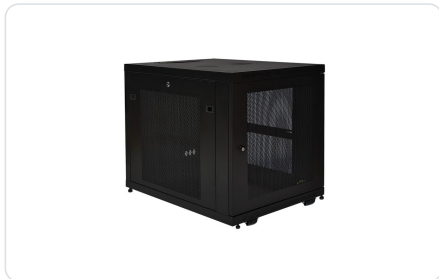

02 Full specifications

GENERAL

Manufacturer	Eaton (Tripp Lite Series)
Model	SR12UB
Series	SmartRack Floor-Standing Enclosure
Rack type	Small Enclosure
UPC	037332157911
Compatible devices	Patch Panel, Network Switch, UPS, Server

DIMENSIONS

Height in U	12U
External dimensions (H × W × D)	638 × 600 × 851 mm
Rack depth class	Mid
Usable equipment depth	76–826 mm

Factory preset rail depth 719 mm

Unit weight 47.63 kg

MOUNTING

Vertical mounting rails 4

Rail hole type square-hole (cage nut)

DOORS & PANELS

Front door Locking reversible vented front door

Rear door Locking reversible perforated rear door

Side panels Locking removable side panels

Lock Keyed locks, keys included

LOAD

Static load rating 454 kg

Rolling load rating 454 kg

CONSTRUCTION

Material Steel, powder-coated

Colour Black

Grounding Front and Back door frames

Assembly Ships fully assembled

COMPLIANCE

Standards RoHS, EIA/ECA-310-E, UKCA

Certifications UL 60950-1

WARRANTY

Warranty 5-year limited warranty

PACKAGE

Package contents SmartRack 12U Mid-Depth Rack Enclosure Cabinet; (36) M6 screws; (36) M6 cage nuts; (36) M6 washers; SRACASTER kit (includes 4 casters); (2) keys; Owner's Manual

03 Engineered, delivered & supported by ServerInvest

Engineering & sizing

Selected and sized against your real IT load, room and redundancy targets.

Installation

Delivery, installation and commissioning by our engineers across Europe.

Certified processes

ISO 9001, ISO 14001 and ISO 27001 certified project delivery.

Service & support

Maintenance, spare parts and support from a single partner.



Interested in this solution?

Request a quotation online or talk to a solutions engineer — we reply within one business day.
office@serverinvest.com

