

TECHNICAL DATASHEET

SUPERMICRO · EDGE & EMBEDDED

Supermicro 1U IoT Server SYS-112D-40C-FN8P


1U Compact Telco Edge Server ft. Intel Xeon 6 SoC

SKU SYS-112D-40C-FN8P

1U

LGA4710

Supermicro

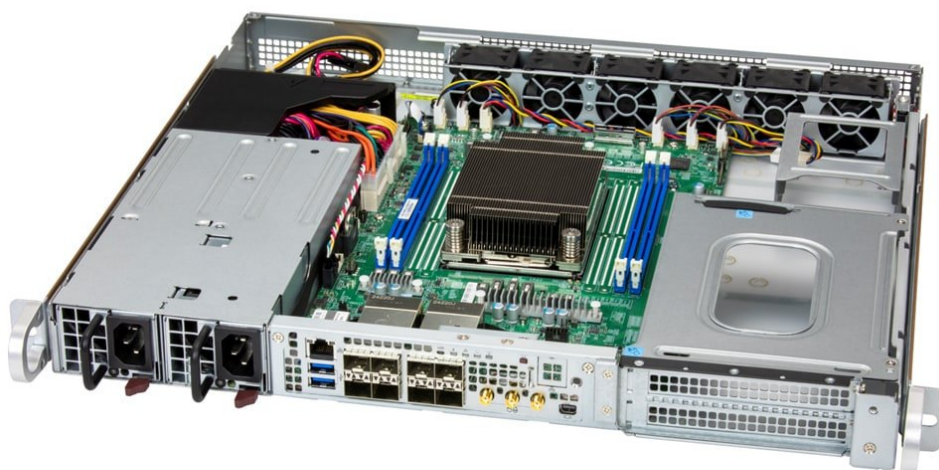

FORM FACTOR

1U

MAX POWER (BASE)

269 W

HEAT OUTPUT

918 BTU/h

PRICE

On request**CONFIGURE & QUOTE ONLINE**serverinvest.com/product/sys-112d-40c-fn8p

01 Product overview

The Supermicro SYS-112D-40C-FN8P is a 1U IoT Server built on Intel Xeon 6.

1U Compact Telco Edge Server ft. Intel Xeon 6 SoC.

The chassis accepts up to 1 GPU accelerators for AI, rendering and HPC workloads.


ServerInvest configures every SYS-112D-40C-FN8P to order, updates BIOS and BMC firmware, installs your operating system on request and runs a 48-hour burn-in test before delivery. Every system includes a 3-year warranty.

HIGHLIGHTS

- Intel Xeon 6
- Total 2 bays 2 internal fixed 2.5" NVMe drive bays
- Up to 1 GPUs
- Power: 2x 800W
- Networking: 8 SFP28 25GbE with Intel SoC

KEY SPECIFICATIONS

Form factor	1U
Processor	Intel Xeon 6
Socket	LGA4710
Memory	4 DIMM slots
Memory type	DDR5-6400 ECC RDIMM
Drive bays	2 (2 NVMe)
GPU	Up to 1 GPUs
Power supply	2× 800 W
Typical power draw	900 W
Networking	8 SFP28 25GbE with Intel SoC
Dimensions (W×H×D)	437 × 44 mm

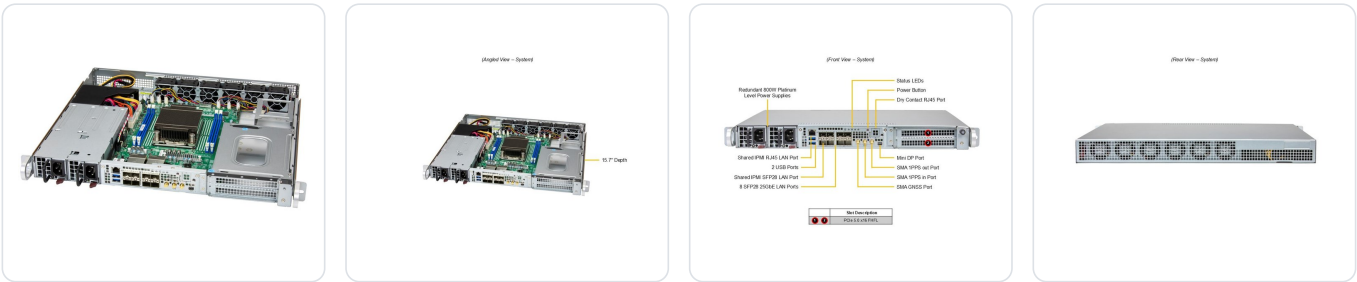

02 Base configuration

Components included in the listed base price — every part can be changed in the online configurator

COMPONENT	DESCRIPTION	QTY
Base system	Supermicro 1U IoT Server SYS-112D-40C-FN8P	1
Processor	Intel Xeon 6505P Processor 12 Cores (48M Cache, 2.20Ghz) 150W	1
Memory	16GB 6400MT/s DDR5 ECC Registered DIMM Module	2
Warranty & support	3-year return-to-base warranty (included)	1

Price on request — contact us for a tailored quotation

03 Power & thermal

Calculated for the base configuration

IDLE	TYPICAL	MAXIMUM	HEAT (MAX)	COOLING	PSU LOAD
71 W	178 W	269 W	918 BTU/h	0.3 kW	34%

Typical 178 W · max 269 W · single PSU rating 800 W

Annual IT energy (24/7)	1,278 kWh
Annual facility energy (PUE 1.5)	1,917 kWh
Annual energy cost	€256 IT · €383 incl. cooling (at 0.20 €/kWh)
CO ₂ emissions / year	0.50 t (grid factor 0.26 kg/kWh)
Power supplies	2× 800 W redundant (N+1)


POWER BY COMPONENT

	IDLE	TYPICAL	MAX
Chassis, motherboard, fans, BMC	38 W	59 W	85 W
CPU — Intel Xeon 6505P Processor 12 Cores	23 W	98 W	150 W
2× Memory 16 GB DIMM	6 W	10 W	18 W

DC loads converted to wall power at 94% PSU efficiency; typical load assumed 70% of the time. Engineering estimates — confirm with the manufacturer's power calculator for critical designs.

04 Power connection diagram

Dual-feed (A/B) connection for redundant power supplies

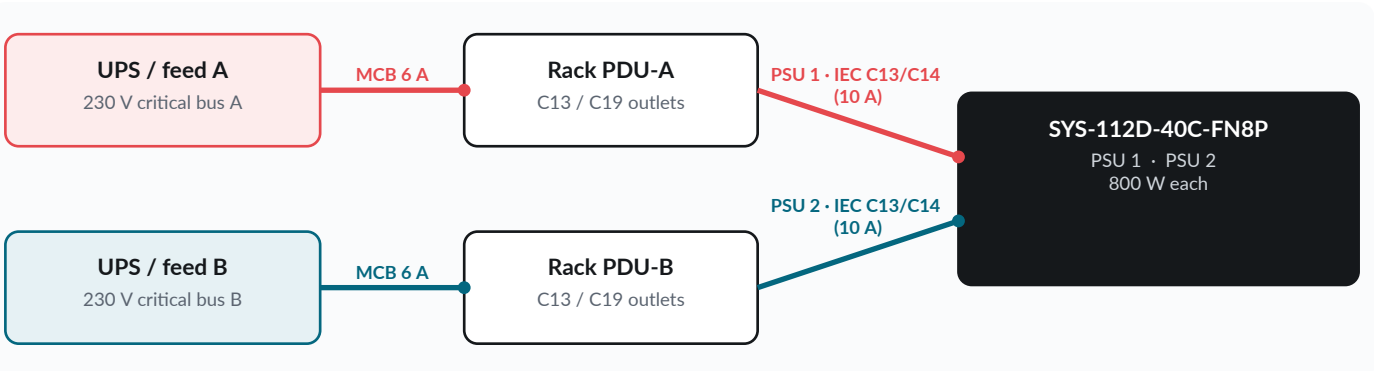

- Connect PSU 1 to PDU-A and PSU 2 to PDU-B (independent feeds) using IEC C13/C14 (10 A) power cords.
- Maximum current per feed: 1.2 A at 230 V — each feed must be able to carry the full load if the other fails.
- Recommended protection per PDU circuit: MCB 6 A, curve C; RCD according to local regulations.
- Heat to remove at full load: 269 W = 918 BTU/h (0.3 kW).

05 Full specifications

MOTHERBOARD

Super X14SDW-40C-SP9F

PROCESSOR

CPU	Intel Xeon 6 SoC
Core Count	40C/80T; 160MB Cache

Note Supports up to 235W TDP CPUs (Air Cooled)

GPU

Max GPU Count Up to 1 single-width GPU

SYSTEM MEMORY

Memory Slot Count: 4 DIMM slots/4 Channels
Max Memory (1DPC): 512GB 6400MT/s ECC DDR5 RDIMM
[View Memory Options](#)

Memory Voltage 1.1V

ON-BOARD DEVICES

NVMe NVMe; RAID 0/1/5/10 support(Intel VROC RAID key required)
[View NVMe Options](#)

Network Connectivity 8 SFP28 25GbE with Intel SoC
[View AOC Options](#)

INPUT / OUTPUT

LAN 1 RJ45 1 GbE LAN port (Intel I210-IT) (IPMI shared on LAN port 1)
8 SFP28 25 GbE LAN ports (Intel SOC) (IPMI shared on LAN port 1)

USB 2 USB 3.2 Gen1 Type-A ports (front)

Video 1 mini-DP port

TPM 1 TPM header
1 TPM Onboard/port 80

Others 1 Dry contact (4 sets) port
3 SMA (GNSS / 1PPS in / 1PPS out) ports

SYSTEM BIOS

BIOS Type AMI 64MB SPI Flash EEPROM

MANAGEMENT

Software SuperCloud Composer (SCC)
Supermicro Server Manager (SSM)
Super Diagnostics Offline (SDO)
Supermicro Thin-Agent Service (TAS)
SuperServer Automation Assistant (SAA) New!

Power configurations Power-on mode for AC power recovery
ACPI Power Management

SECURITY

Hardware Trusted Platform Module (TPM) 2.0

Features Cryptographically Signed Firmware
Secure Boot
Secure Firmware Updates
Automatic Firmware Recovery
System Lockdown

PC HEALTH MONITORING

CPU	Monitors for CPU Cores, +3.3V, +5V, +12V, +3.3V Standby, +5V Standby, VBAT, Memory, Chipset Voltages.
Fan	Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control
Temperature	Monitoring for CPU and chassis environment Thermal Control for fan connectors
Voltage	Voltage, VBAT, Memory temperature, CPU temperature, 3.3V standby, +5V standby, +5V, +3.3V, +12V, VRM temperature, CPU thermal trip support, 1.8V standby

CERTIFICATIONS

Operating Systems	Oracle Linux 10.0, RHEL 10.0, Windows Server 2022, Windows Server 2025 View all OS Compatibility and Certification Matrix
-------------------	--

CHASSIS

Form Factor	1U Rackmount
Model	CSE-515M2-R000NP

DIMENSIONS AND WEIGHT

Height	1.7" (43 mm)
Width	17.2" (437 mm)
Depth	15.7" (399 mm)
Package	8" (H) x 27" (W) x 24" (D)
Weight	Gross Weight: 29 lbs (13.15 kg) Net Weight: 18 lbs (8.16 kg)
Available Color	No Paint

FRONT PANEL

Buttons	Power On/Off UID button
LED	HDD activity LAN1 activity LAN2 activity Power status System information

EXPANSION SLOTS

PCI-Express (PCIe) Configuration	Default 2 PCIe 5.0 x16 (in x16) FHHL slots View AOC Options
----------------------------------	---

DRIVE BAYS / STORAGE

Drive Bays Configuration	Default: Total 2 bays 2 internal fixed 2.5" NVMe drive bays View NVMe Options
M.2	1 M.2 PCIe 4.0 x2 NVMe slot (M-key 2280(default)) View M.2 Options

SYSTEM COOLING

Fans	Up to 6x 4cm heavy duty fans with optimal fan speed control
Air Shroud	2 Air Shrouds

POWER SUPPLY

2x 800W
2x 600W
2x 800W
2x 800W
2x 800W Redundant (1 + 1) Platinum Level (94%) power supplies
Dimension (WxHxL)
54.5 x 40.25 x 220 mm

OPERATING ENVIRONMENT

Environmental Spec.	Operating Temperature: 0°C to 40°C (32°F to 104°F) Non-operating Temperature: -40°C to 70°C (-40°F to 158°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
---------------------	---

06 Built, tested & supported by ServerInvest

Engineered configuration

Every option validated for socket, memory channels, PCIe lanes, power and cooling.

48-hour burn-in

Assembled, firmware-updated and stress-tested before it leaves our workshop.

3-year warranty

Standard on every system, with on-site next-business-day upgrades available.

Rack-ready delivery

Rails, cable management and labelling included — delivered across Europe.



Ready to order or need changes?

Configure this system online or talk to a solutions engineer — we reply within one business day.

office@serverinvest.com

Official manufacturer datasheet: serverinvest.com/product/sys-112d-40c-fn8p/datasheet/manufacture

