

TECHNICAL DATASHEET

SUPERMICRO · GPU & AI SERVERS

Supermicro 4U GPU Server SYS-422GS-NBRT-LCC

DP Intel 4U Liquid-Cooled System with NVIDIA HGX B200 8-GPU (complete rack and onsite service are required)

SKU SYS-422GS-NBRT-LCC

4U

LGA4710

Supermicro



FORM FACTOR

4U

MAX POWER (BASE)

645 W

HEAT OUTPUT

2,201 BTU/h

PRICE

On request

CONFIGURE & QUOTE ONLINE

serverinvest.com/product/sys-422gs-nbrt-lcc

01 Product overview

The Supermicro SYS-422GS-NBRT-LCC is a 4U GPU Server built on dual Intel Xeon 6 processors with up to 8 TB of memory in 32 DIMM slots.

DP Intel 4U Liquid-Cooled System with NVIDIA HGX B200 8-GPU (complete rack and onsite service are required).


ServerInvest configures every SYS-422GS-NBRT-LCC to order, updates BIOS and BMC firmware, installs your operating system on request and runs a 48-hour burn-in test before delivery. Every system includes a 3-year warranty.

HIGHLIGHTS

- Dual Intel Xeon 6
- Up to 8 TB memory · 32 DIMM slots
- Total 8 bays 8 front hot-swap E1.S NVMe drive bays
- Power: 4x 6600W
- Networking: 2 RJ45 10GbE with Intel X710-AT2

KEY SPECIFICATIONS

Form factor	4U
Processor	2× Intel Xeon 6
Socket	LGA4710
Memory	32 DIMM slots, up to 8 TB
Memory type	DDR5-6400 ECC RDIMM
Drive bays	8 (8 NVMe)
Power supply	4× 6600 W
Typical power draw	750 W
Networking	2 RJ45 10GbE with Intel X710-AT2
Dimensions (W×H×D)	437 × 178 mm

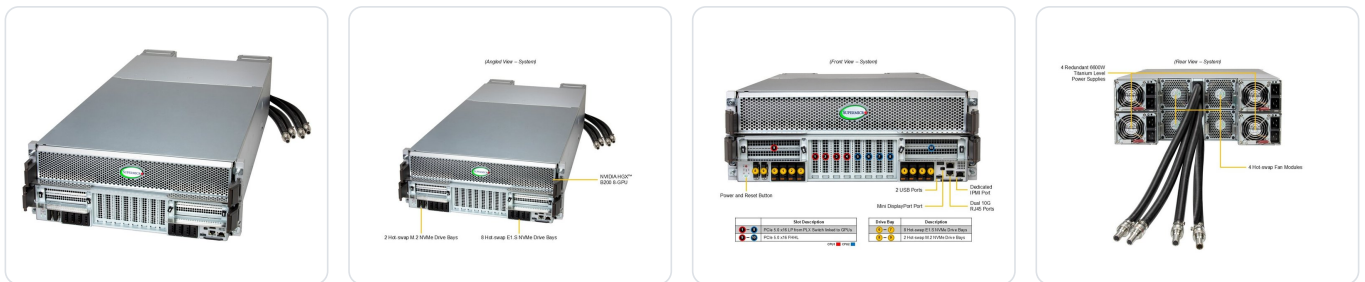

02 Base configuration

Components included in the listed base price — every part can be changed in the online configurator

COMPONENT	DESCRIPTION	QTY
Base system	Supermicro 4U GPU Server SYS-422GS-NBRT-LCC	1
Processor	Intel Xeon 6710E Processor 64 Cores (96M Cache, 2.40Ghz) 205W	2
Memory	16GB 6400MT/s DDR5 ECC Registered DIMM Module	4
Warranty & support	3-year return-to-base warranty (included)	1


Price on request — contact us for a tailored quotation

03

Power & thermal

Calculated for the base configuration

IDLE 155 W	TYPICAL 423 W	MAXIMUM 645 W	HEAT (MAX) 2,201 BTU/h	COOLING 0.6 kW	PSU LOAD 10%
----------------------------------	-------------------------------------	-------------------------------------	--	--------------------------------------	------------------------------------



Annual IT energy (24/7)	3,001 kWh
Annual facility energy (PUE 1.5)	4,502 kWh
Annual energy cost	€600 IT · €900 incl. cooling (at 0.20 €/kWh)
CO ₂ emissions / year	1.17 t (grid factor 0.26 kg/kWh)
Power supplies	4× 6600 W redundant (N+1)


POWER BY COMPONENT	IDLE	TYPICAL	MAX
Chassis, motherboard, fans, BMC	72 W	112 W	160 W
2× CPU — Intel Xeon 6710E Processor 64 Cores	62 W	266 W	410 W
4× Memory 16 GB DIMM	12 W	20 W	36 W

DC loads converted to wall power at 94% PSU efficiency; typical load assumed 70% of the time. Engineering estimates — confirm with the manufacturer's power calculator for critical designs.

04

Power connection diagram

Dual-feed (A/B) connection for redundant power supplies

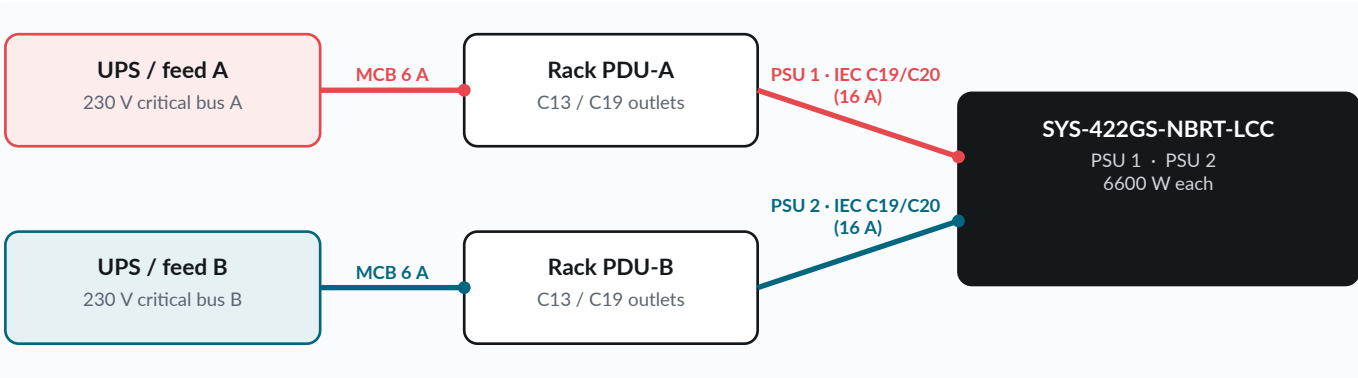

- Connect PSU 1 to PDU-A and PSU 2 to PDU-B (independent feeds) using IEC C19/C20 (16 A) power cords.
- Maximum current per feed: 3 A at 230 V — each feed must be able to carry the full load if the other fails.
- Recommended protection per PDU circuit: MCB 6 A, curve C; RCD according to local regulations.
- Heat to remove at full load: 645 W = 2,201 BTU/h (0.6 kW).

05

Full specifications

MOTHERBOARD	
	Super X14DBG-LC
PROCESSOR	
CPU	Dual Socket E2 (LGA-4710) Intel Xeon 6700 series processors with P-cores
Core Count	Up to 86C/172T; Up to 336MB Cache per CPU

Note Supports up to 350W TDP CPUs (Liquid Cooled)

GPU

Max GPU Count	8 onboard GPUs
Supported GPU	NVIDIA SXM: HGX B200 8-GPU (180GB) View GPU Options
GPU-GPU Interconnect	NVIDIA NVLink with NVSwitch

SYSTEM MEMORY

Memory	Slot Count: 32 DIMM slots Max Memory (1DPC): Up to 4TB 6400MT/s ECC DDR5 RDIMM Max Memory (2DPC): Up to 8TB 6000MT/s ECC DDR5 RDIMM View Memory Options
Memory Voltage	1.1V

ON-BOARD DEVICES

Network Connectivity	2 RJ45 10GbE with Intel X710-AT2 View AOC Options
----------------------	--

INPUT / OUTPUT

LAN	2 RJ45 10 GbE LAN ports (Intel X710)
USB	1 USB 3.0 Type-A port (Front) 1 USB 2.0 Type-A port (Front)
Video	1 VGA port (Front) 1 Mini-DP port (Front)
TPM	1 TPM header

SYSTEM BIOS

BIOS Type	AMI 64MB UEFI
-----------	---------------

MANAGEMENT

Software	SuperCloud Composer (SCC) Supermicro Server Manager (SSM) Super Diagnostics Offline (SDO) Supermicro Thin-Agent Service (TAS) SuperServer Automation Assistant (SAA) New!
Power configurations	Power-on mode for AC power recovery ACPI Power Management

SECURITY

Hardware	Trusted Platform Module (TPM) 2.0 Silicon Root of Trust (RoT) – NIST 800-193 Compliant
Features	Cryptographically Signed Firmware Secure Boot Secure Firmware Updates Automatic Firmware Recovery Supply Chain Security: Remote Attestation Runtime BMC Protections System Lockdown

PC HEALTH MONITORING

CPU	8+4 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory
Fan	Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control
Temperature	Monitoring for CPU and chassis environment Thermal Control for fan connectors

CERTIFICATIONS

Operating Systems	Oracle Linux 9.6, RHEL 10.0 View all OS Compatibility and Certification Matrix
-------------------	---

CHASSIS

Form Factor	4U Rackmount
Model	CSE-GP405TS-R000NP

DIMENSIONS AND WEIGHT

Height	6.85" (174 mm)
Width	17.6" (448 mm)
Depth	39.03" (991.4 mm)
Package	16.14" (H) x 31.29" (W) x 54.92" (D)
Weight	Gross Weight: 222 lbs (101 kg) Net Weight: 187 lbs (85 kg)
Available Color	Silver

FRONT PANEL

Buttons	Power On/Off UID
LED	HDD activity LAN1 activity LAN2 activity Power Fail Power status System information (overheat/UID)

EXPANSION SLOTS

PCI-Express (PCIe) Configuration	Default 2 PCIe 5.0 x16 FHHL slots 8 PCIe 5.0 x16 LP slots View AOC Options
----------------------------------	---

DRIVE BAYS / STORAGE

Drive Bays Configuration	Default: Total 8 bays 8 front hot-swap E1.S NVMe drive bays View NVMe Options
M.2	2 M.2 NVMe slots (M-key; RAID support via S3808N controller) View M.2 Options

SYSTEM COOLING

Fans	4x 80mm Fan(s)
Liquid Cooling	Direct to Chip (D2C) Cold Plate

POWER SUPPLY

4x 6600W
4x 6600W Redundant (2 + 2) Titanium Level (96%) Hot-plug power supplies
Dimension (WxHxL)
106.5 x 82.1 x 245.3 mm

OPERATING ENVIRONMENT

Environmental Spec.	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -5°C to 60°C (23°F to 140°F) Operating Relative Humidity: 8% to 80% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
---------------------	---

06 Built, tested & supported by ServerInvest

Engineered configuration

Every option validated for socket, memory channels, PCIe lanes, power and cooling.

48-hour burn-in

Assembled, firmware-updated and stress-tested before it leaves our workshop.

3-year warranty

Standard on every system, with on-site next-business-day upgrades available.

Rack-ready delivery

Rails, cable management and labelling included — delivered across Europe.



Ready to order or need changes?

Configure this system online or talk to a solutions engineer — we reply within one business day.

office@serverinvest.com

Official manufacturer datasheet: serverinvest.com/product/sys-422gs-nbrt-lcc/datasheet/manufacture

