

TECHNICAL DATASHEET

SUPERMICRO • GPU & AI SERVERS

Supermicro Full-Tower GPU Server SYS-740GP-TNRBT

DP Intel, Tower Workstation with 4 GPUs

SKU SYS-740GP-TNRBT

Tower

LGA4189

Supermicro



FORM FACTOR

Tower

MAX POWER (BASE)

522 W

HEAT OUTPUT

1,781 BTU/h

PRICE

On request

REQUEST A QUOTATION ONLINE

serverinvest.com/product/sys-740gp-tnrbt

01 Product overview

The Supermicro SYS-740GP-TNRBT is a Full-Tower GPU Server built on dual Intel Xeon Scalable 3rd Gen processors with up to 4 TB of memory in 16 DIMM slots.

DP Intel, Tower Workstation with 4 GPUs.

The chassis accepts up to 4 GPU accelerators for AI, rendering and HPC workloads.

ServerInvest configures every SYS-740GP-TNRBT to order, updates BIOS and BMC firmware, installs your operating system on request and runs a 48-hour burn-in test before delivery. Every system includes a 3-year warranty.

HIGHLIGHTS

- Dual Intel Xeon Scalable 3rd Gen
- Up to 4 TB memory · 16 DIMM slots
- Total 8 bays 4 front hot-swap 3.5" SAS/SATA drive bays
- Up to 4 GPUs
- Power: 1x 2200W
- Networking: 2 RJ45 10GbE with Broadcom BCM57416

KEY SPECIFICATIONS


Form factor	Tower
Processor	2× Intel Xeon Scalable 3rd Gen
Socket	LGA4189
Memory	16 DIMM slots, up to 4 TB
Drive bays	12 (12 NVMe)
GPU	Up to 4 GPUs
Power supply	1× 2200 W
Typical power draw	2550 W
Networking	2 RJ45 10GbE with Broadcom BCM57416



02 Power & thermal

Calculated for the base configuration

IDLE	TYPICAL	MAXIMUM	HEAT (MAX)	COOLING	PSU LOAD
106 W	318 W	522 W	1,781 BTU/h	0.5 kW	24%




Annual IT energy (24/7)	2,229 kWh
Annual facility energy (PUE 1.5)	3,344 kWh
Annual energy cost	€446 IT · €669 incl. cooling (at 0.20 €/kWh)
CO ₂ emissions / year	0.87 t (grid factor 0.26 kg/kWh)
Power supplies	1× 2200 W

POWER BY COMPONENT	IDLE	TYPICAL	MAX
Chassis, motherboard, fans, BMC	38 W	59 W	85 W
2× CPU (base configuration)	50 W	220 W	370 W
4× Memory (base configuration)	12 W	20 W	36 W

DC loads converted to wall power at 94% PSU efficiency; typical load assumed 70% of the time. Engineering estimates — confirm with the manufacturer's power calculator for critical designs.

03 Power connection diagram

Dual-feed (A/B) connection for redundant power supplies

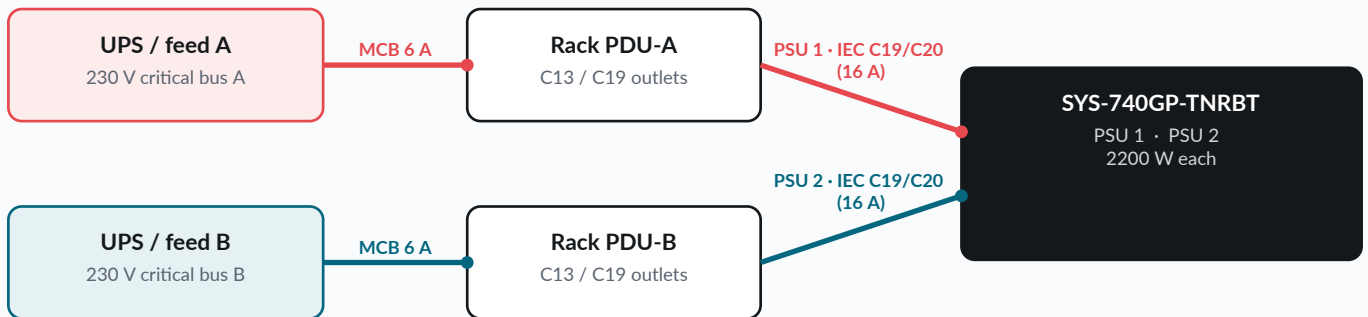

- Connect PSU 1 to PDU-A and PSU 2 to PDU-B (independent feeds) using IEC C19/C20 (16 A) power cords.
- Maximum current per feed: 2.4 A at 230 V — each feed must be able to carry the full load if the other fails.
- Recommended protection per PDU circuit: MCB 6 A, curve C; RCD according to local regulations.
- Heat to remove at full load: 522 W = 1,781 BTU/h (0.5 kW).

04 Full specifications

MOTHERBOARD

Super X12DPG-QBT6

PROCESSOR

CPU	Dual Socket P+ (LGA-4189) 3rd Gen Intel Xeon Scalable processors
Core Count	Up to 40C/80T; Up to 60MB Cache per CPU
Note	Supports up to 270W TDP CPUs (Air Cooled)

GPU

Max GPU Count	Up to 4 double-width GPUs
CPU-GPU Interconnect	PCIe 4.0 x16 CPU-to-GPU Interconnect
GPU-GPU Interconnect	PCIe

SYSTEM MEMORY

Memory	Slot Count: 16 DIMM slots Max Memory (2DPC): Up to 4TB 3200MT/s ECC DDR4 RDIMM/LRDIMM Supports Intel Optane persistent memory 200 series View Memory Options
Memory Voltage	1.2V

ON-BOARD DEVICES

SATA	SATA (6Gbps) ; RAID 0/1/5/10 support
Network Connectivity	2 RJ45 10GbE with Broadcom BCM57416 View AOC Options
BMC	ASPEED AST2600 BMC

INPUT / OUTPUT

Video	1 VGA port
-------	------------

SYSTEM BIOS

BIOS Type	AMI 32MB SPI Flash EEPROM
-----------	---------------------------

MANAGEMENT

Software	SuperCloud Composer (SCC) Supermicro Server Manager (SSM) Supermicro Update Manager (SUM) Supermicro SuperDoctor 5 (SD5) Super Diagnostics Offline (SDO) Supermicro Thin-Agent Service (TAS) SuperServer Automation Assistant (SAA) New!
----------	--

Power configurations	Power-on mode for AC power recovery ACPI Power Management
----------------------	--

SECURITY

Hardware	Trusted Platform Module (TPM) 2.0 Silicon Root of Trust (RoT) – NIST 800-193 Compliant
----------	---

Features	Cryptographically Signed Firmware Secure Boot Secure Firmware Updates Automatic Firmware Recovery System Lockdown
----------	---

PC HEALTH MONITORING

CPU	7 +1 Phase-switching voltage regulator Monitors for CPU Cores, Chipset Voltages, Memory
-----	--

Fan	Fans with tachometer monitoring Pulse Width Modulated (PWM) fan connectors Status monitor for speed control
-----	---

Temperature	Monitoring for CPU and chassis environment Thermal Control for fan connectors
-------------	--

CHASSIS

Form Factor	Full-Tower Rackmount
-------------	----------------------

Model	CSE-747BTS-R2K20BP
-------	--------------------

DIMENSIONS AND WEIGHT

Height	18.32" (465.4 mm)
Width	6.96" (177 mm)
Depth	26.71" (678.5 mm)
Package	12.95" (H) x 27.12" (W) x 38.22" (D)
Weight	Gross Weight: 57 lbs (25.85 kg) Net Weight: 52.9 lbs (24 kg)
Available Color	black

FRONT PANEL

Buttons	Power On/Off System Reset
LED	HDD activity Network activity Power On System Overheat / Fan Fail LED

EXPANSION SLOTS

PCI-Express (PCIe) Configuration	Default 4 PCIe 4.0 x16 FHFL slots 2 PCIe 4.0 x16 LP slots 1 PCIe 4.0 x8 LP slot View AOC Options
----------------------------------	--

DRIVE BAYS / STORAGE

Drive Bays Configuration	Default: Total 8 bays 4 front hot-swap 3.5" SAS/SATA drive bays 4 front hot-swap 3.5" NVMe/SAS/SATA drive bays View Drive Options
M.2	2 M.2 NVMe/SATA slots (M-key) View M.2 Options

SYSTEM COOLING

Fans	Up to 4 heavy duty fans with optimal fan speed control
------	--

POWER SUPPLY

1x 2200W
1x 2200W Redundant Titanium Level (96%) power supply
Dimension (WxHxL)
76 x 40 x 336 mm

OPERATING ENVIRONMENT

Environmental Spec.	Operating Temperature: 10°C to 35°C (50°F to 95°F) Non-operating Temperature: -40°C to 60°C (-40°F to 140°F) Operating Relative Humidity: 8% to 90% (non-condensing) Non-operating Relative Humidity: 5% to 95% (non-condensing)
---------------------	---

05 Built, tested & supported by ServerInvest

Engineered configuration

Every option validated for socket, memory channels, PCIe lanes, power and cooling.

48-hour burn-in

Assembled, firmware-updated and stress-tested before it leaves our workshop.

3-year warranty

Standard on every system, with on-site next-business-day upgrades available.

Rack-ready delivery

Rails, cable management and labelling included — delivered across Europe.



Interested in this solution?

Request a quotation online or talk to a solutions engineer — we reply within one business day.
office@serverinvest.com

Official manufacturer datasheet: serverinvest.com/product/sys-740gp-tnrbt/datasheet/manufacturerr

